
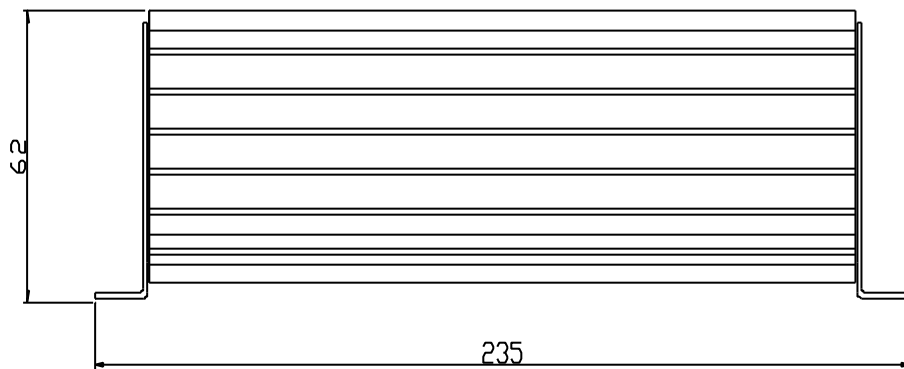


Model:	VA-24150T	Technologic Data
Certificate		CE
Based on:		IEC 61347
Input	Rated voltage:	AC170 - 250V
	Frequency:	50 - 60Hz
	Input power (Loading):	= 185W
Output	Output voltage (Loading):	DC24V± 0.5V
	Output current (Loading):	DC 6.25A
	Short-circuits protect:	1-2 output shorted 3 seconds, and will work normally after separated.
	Over loading:	Protected
Voltage resistance	Input-Output	AC 1.5KV/5mA 1Min
	Input-Housing	AC 1.5KV/5mA 1Min
Working Temperature		-25C + 40C

Feature testing

Testing Contents	Testing Qty	1	2	3	4	5
Input voltage:		AC220V 50Hz				
High voltage test	Input—Output:	OK	OK	OK	OK	OK
	Input— Housing:	OK	OK	OK	OK	OK
Input power (Loading current 6.25A)		179.2W	178.0W	176.9W	179.0W	178.0W
Output voltage (Loading current 6.25A)		24.1V	24.2V	24.1V	24.2V	24.2V
Output voltage (Loading current 0A)		24.3V	24.3V	24.3V	24.3V	24.3V
Short-circuit:		OK	OK	OK	OK	OK
Over loading:		NA	NA	NA	NA	NA
Verdict:		Pass				

MODEL: VA-24150T / Housing Size (mm):

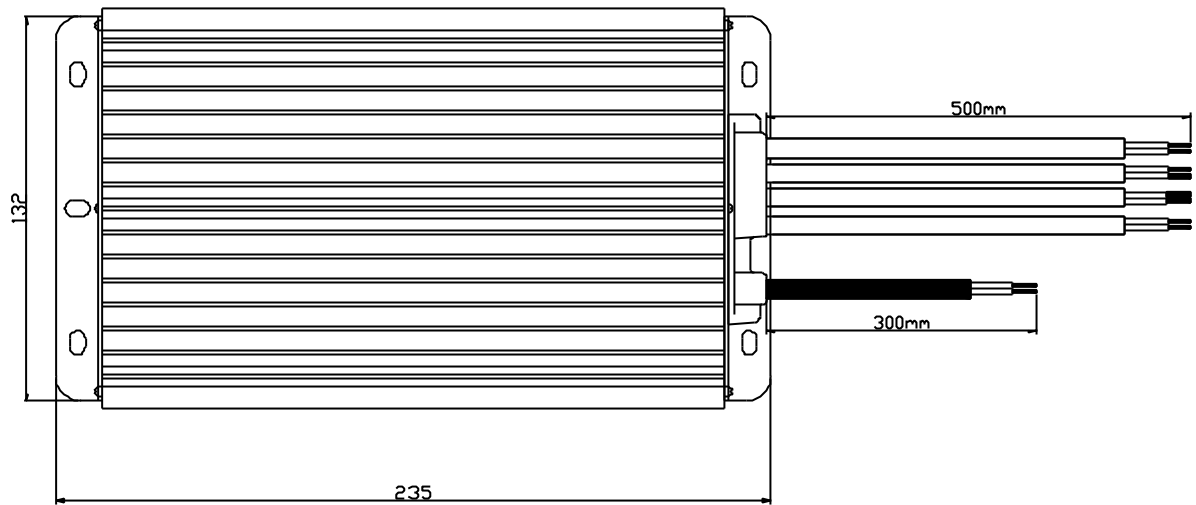

Housing Material: (AL)

Cable Model of input: VDE H03VV-F 3G0.75mm² / black

Cable Model of output: VDE H03VV-F 2*0.75mm² / white

Packing Size Qty: 437mm × 302mm × 185mm/5PCS