


Model:	VA-24060P	Technologic Data
Certificate	CE	
Based on:	IEC 61347	
Input	Input voltage range:	AC 170~250V
	Rated voltage:	AC 220V
	Frequency:	50~60Hz
	Input power (Loading):	≤ 74W
Output	Output voltage (Loading):	DC 24 ± 0.5V
	Output current (Loading):	DC 2.5A
	Short-circuits protect:	1-2 output shorted 3 seconds, and will work normally after separated.
	Over loading:	Protection
Voltage resistance	Input-Output	AC 1.5KV/5mA 1Min
	Input-Housing	AC 1.5KV/5mA 1Min
Working Temperature	-25°C ~ +40°C	

#### Feature testing

Testing Contents	Testing Qty	1	2	3	4	5
Input voltage:		AC 220V 50Hz				
High voltage test	Input—Output:	OK	OK	OK	OK	OK
	Input— Housing:	OK	OK	OK	OK	OK
Input power (Loading current 2.5A)		73.5W	73.0W	73.3W	73.0W	73.0W
Output voltage (Loading current 2.5A)		24.1V	24.0V	24.1V	24.0V	24.0V
Output voltage (Loading current 0A)		24.0V	24.0V	24.0V	24.0V	24.0V
Short-circuit:		OK	OK	OK	OK	OK
Over loading:		OK	OK	OK	OK	OK
Verdict:		Pass				

Top view the VA-24060P

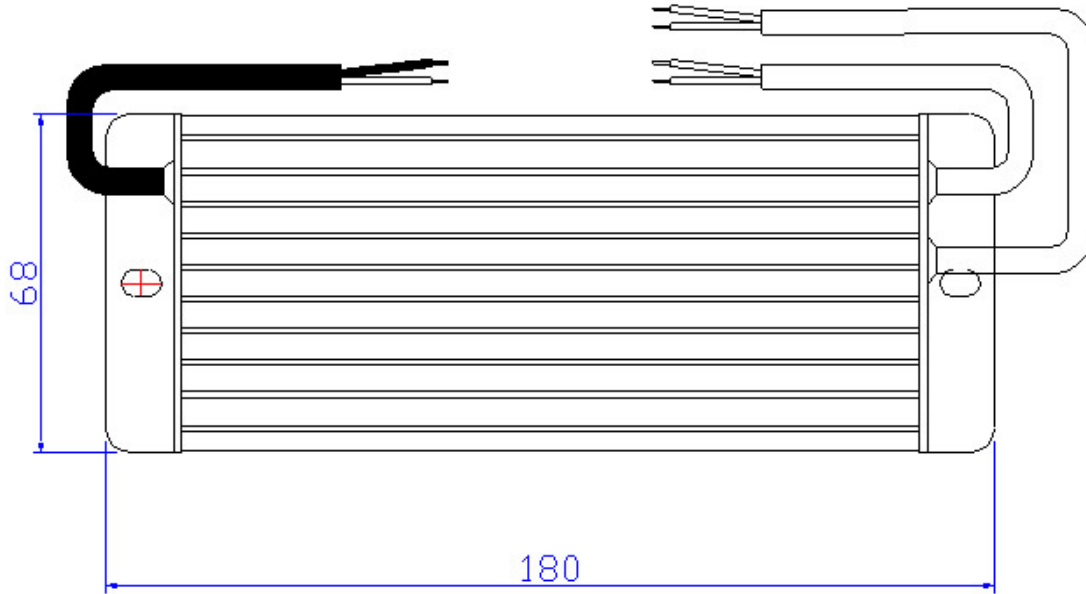

Side view VA-24060P

